

CC COMPACT LEDSET



COMFORTLINE LEDSET S

186913

Typical Applications

Built-in in outdoor luminaires



ComfortLine LEDSet S

- **SELECTABLE OUTPUT CURRENT VIA LEDSET**
- **VERY LOW RIPPLE CURRENT: < 3%**
- **SURGE PROTECTION: UP TO 6 KV**
- **SELV**
- **LONG SERVICE LIFE:
UP TO 120,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



ComfortLine LEDSet S

Product features

- Compact casing shape

Functions

- Selectable current output by secondary side LEDSet terminal.
- The output current can be freely adjusted between 150 mA and 850 mA by using a resistor (according LEDSet standard).

Electrical features

- Mains voltage: 220–240 V \pm 10%
- Mains frequency: 50–60 Hz
- Push-in terminals: 0.2–1.5 mm²
- Power factor at full load: > 0.95
- Open circuit voltage (U_{max.}): 60 V
- Secondary side switching of LED modules is not allowed.

Safety features

- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV


Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186913			155



Dimensions

- Casing: K2
- Length: 103.6 mm
- Width: 67.4 mm
- Height: 31 mm

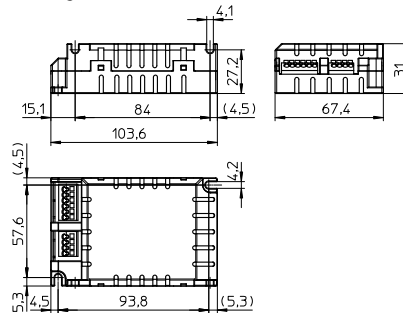


Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015



Current adjustment



Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
45	ECXe 850.377	186913	220–240	240–220	100 / 1	150–850	25–52		> 87	< 3

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
186913	-40	+60	5	60	-40	+85	5	95	+80	IP20

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.	
	186913	
All	70 °C	80 °C
hrs.	120,000	60,000

Product label

VS LIGHTING SOLUTIONS
 Vossloh-Schwabe Deutschland GmbH
 Hohe Steinert 8, D-58509 Lüdenscheid
 Electronic Converter for LED
Type ECXd850.377
 Ref.-No. 186913
 Made in Germany

PR
 $U_n = 220...240 V \sim$
 $I_n = 240...220 mA$
 $f_n = 50...60 Hz$
 $\lambda > 0,90$

N ■
L ■

LEDset 1 ■
GNDset ■

SEC
 $I_{rated} = 150...850 mA$
 $U = 25...32 V \sim$
 $U_{max} < 60 V$
 $P_{max} = 45 W$
SELV

EAC **CE** **ELC**


$t_a = -40...+60^\circ C$
 $t_c = 80^\circ C$

tc


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 186913 / Type ECXe 850.377


Working area

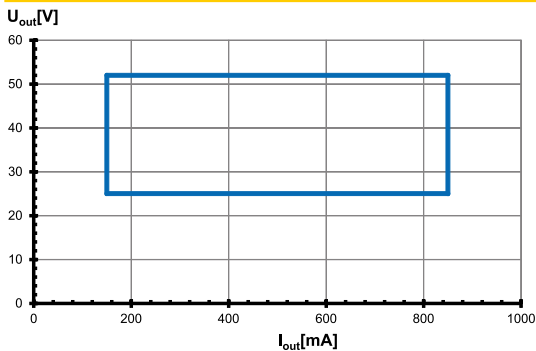


Efficiency

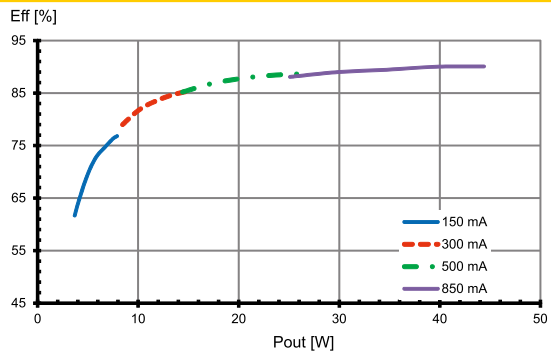

Power factor

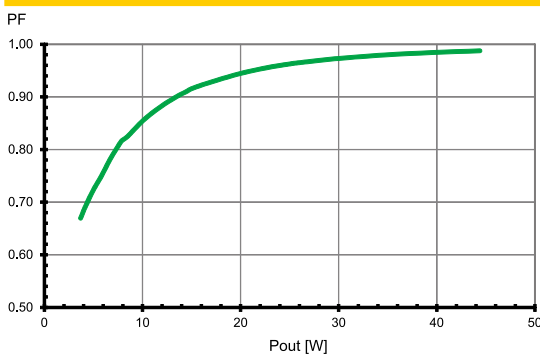

Total harmonic factor (THD)

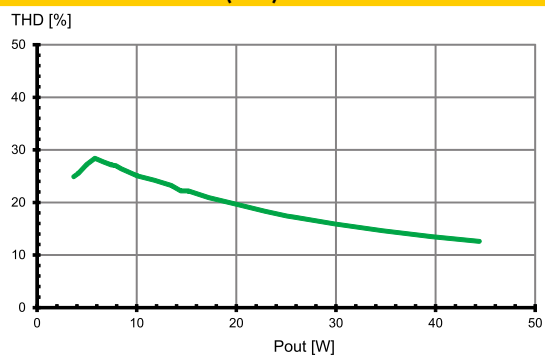

Safety functions

- Transient mains peaks protection:
 - Values are in compliance with EN 61547 (interference immunity).
 - Surges between L-N: up to 6 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree. Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection. In case of overheating the control gear will shut down.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices. Independent LED drivers do not need to be integrated into a casing. Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing. LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of 0.2–1.5 mm²
- Stripped length: 8.5–10 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference). Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. Max. secondary side lead length: 0.8 m
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.

- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs: High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction: The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers: The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.		
Automatic cut-out type B		B 10 A	B 13 A	B 16 A
ECXe 850.377	186913	37	49	60
Automatic cut-out type C		C 10 A	C 13 A	C 16 A
ECXe 850.377	186913	37	49	60

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Choice of LEDSet Resistor

Output current selection:

- The output current can be adapted within the rated output current range between 150 and 850 mA.
- To change the output current it is necessary to use the correct LEDSet resistor. Values for different currents are figured out in the table below.
- The LEDSet resistor should have a maximum tolerance of 1%.
- Please refer to the electrical values and the operating window to see which combinations are possible.
- Output current / needed LEDSet resistor can be calculated as follows:

$$I_{OUT} = 5V/R_{set} \times 1000$$

$$R_{set} = 5V/I_{OUT} \times 1000$$

- If no LEDSet resistor is mounted (delivery condition) output current is less than nominal I_{min} .
- If LEDSet interface is short circuit output current is limited to I_{max} .

Resistors		ECXe 850.377			
Nominal current I_{rated} mA	Resistor R k Ω	LED output voltage U_{LED}		LED nominal output P_{rated}	
		V min.	V max.	W min.	W max.
150	33.33	25.0	52.0	3.8	7.8
200	25.00	25.0	52.0	5.0	10.4
250	20.00	25.0	52.0	6.3	13.0
300	16.67	25.0	52.0	7.5	15.6
350	14.29	25.0	52.0	8.8	18.2
400	12.50	25.0	52.0	10.0	20.8
450	11.11	25.0	52.0	11.3	23.4
500	10.00	25.0	52.0	12.5	26.0
550	9.09	25.0	52.0	13.8	28.6
600	8.33	25.0	52.0	15.0	31.2
650	7.69	25.0	52.0	16.3	33.8
700	7.14	25.0	52.0	17.5	36.4
750	6.67	25.0	52.0	18.8	39.0
800	6.25	25.0	52.0	20.0	41.6
850	5.88	25.0	52.0	21.3	44.2

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

