

LED LIGHT PANEL SMD

WU-M-520 (250X250)

WU-M-537 (270X270)



LED LIGHT PANEL SMD – LED MODULES FOR OFFICE LIGHTING

WU-M-520/-537

Typical Applications

Built-in luminaires/general illumination

- Office lighting, especially grid luminaires 600x600 mm
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising



LED Light Panel SMD

- **LONG SERVICE LIFE TIME: 60,000 H (L80, B10)**
- **HIGHLY EFFICIENT: UP TO 191 LM/W AT $T_p = 50^\circ\text{C}$**
- **VERY NARROW COLOUR TOLERANCES:
3 STEP MACADAM**

LED Light Panel SMD

Technical Notes

- LED built-in module for integration into luminaires
- Dimensions: 249x249 mm / 269x269 mm
- Driving current: 350 mA / 500 mA / 700 mA
- On-board push-in terminals
- Colour tolerance: 3-step MacAdam



Electrical Characteristics

at $t_p = 50\text{ °C}$

Type	No. of LEDs	Voltage DC* (V)									Temperature coefficient mV/K	Power consumption* (W)								
		350 mA			500 mA			700 mA				350mA			500mA			700mA		
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
All types	64	20.3	21.7	24.3	20.9	22.4	24.9	21.8	23.2	25.8	-26.6	7.1	7.6	8.5	10.5	11.2	12.5	15.3	16.2	18.1

Use of external LED constant current driver required.

Maximum Ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the module.

Type	Operation temperature range at t_c point		Storage temperature range		Max. allowed repetitive peak current mA
	°C min.	°C max.	°C min.	°C max.	
All types	-20	+70	-20	+85	1480

Optical Characteristics

at $t_p = 50\text{ °C}$

Type	Ref. No.	Colour	Correlated colour temperature K	Luminous flux* (lm) and efficiency (lm/W) at									CRI*		Beam angle* °	Photo-metric code
				350 mA			500 mA			700 mA			min.	typ.		
				min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	R_a	R_a		

Dimensions: 249x249 mm

WU-M-520-830	559648	warm white	3000 ^{-80/+130}	1215	1345	177	1715	1900	170	2360	2615	161	80	85	120	830/349
WU-M-520-840	558905	neutral white	4000 ^{-160/+115}	1265	1415	186	1785	1995	178	2460	2745	169	80	85	120	840/349
WU-M-520-850	559649	neutral white	5000 ^{-125/+155}	1380	1450	191	1945	2045	183	2680	2815	173	80	85	120	850/349
WU-M-520-865	559650	cool white	6500 ^{-165/+220}	1265	1430	188	1785	2015	180	2460	2775	171	80	85	120	865/349

Dimensions: 269x269 mm

WU-M-537-830	561098	warm white	3000 ^{-80/+130}	1215	1345	177	1715	1900	170	2360	2615	161	80	85	120	830/349
WU-M-537-840	561099	neutral white	4000 ^{-160/+115}	1265	1415	186	1785	1995	178	2460	2745	169	80	85	120	840/349
WU-M-537-850	561100	neutral white	5000 ^{-125/+155}	1380	1450	191	1945	2045	183	2680	2815	173	80	85	120	850/349
WU-M-537-865	561101	cool white	6500 ^{-165/+220}	1265	1430	188	1785	2015	180	2460	2775	171	80	85	120	865/349

* Measurement tolerance: $\pm 7\%$

Minimum order quantity (packaging unit): 50 pcs.


Operating Life

L80/B10

Temperature	I_F 350 mA	I_F 500 mA	I_F 700 mA
at $t_p = 50\text{ °C}$	> 60,000 hrs.	> 60,000 hrs.	> 60,000 hrs.
at $t_p = 70\text{ °C}$	> 60,000 hrs.	> 60,000 hrs.	> 60,000 hrs.

Typical Light Distribution Curve

Data are available in .ldt format for download under www.vossloh-schwabe.com.




The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Light Panel SMD

Mechanical Dimensions

- The number of modules that can be connected in series depends on the available output voltage of the LED driver.
- The clearance and creepage distances are designed for working voltages up to 500 V DC (basic insulation) and 250 V DC (reinforced insulation).
- Max. diameter of screw head (M4): \varnothing 8 mm


WU-M-520

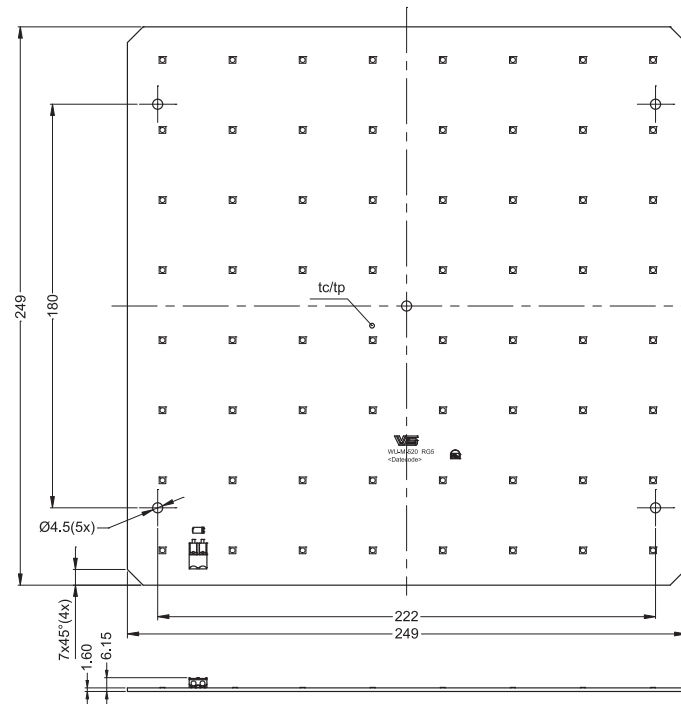


Connection Examples

With 10 mm distance between LED modules

Feed-in lateral with wiring on top




Feed-in central with rear wiring




Connection Diagram 1 – Decentralised Feed-in

4 LED Panels WU-M-520 (all in series)

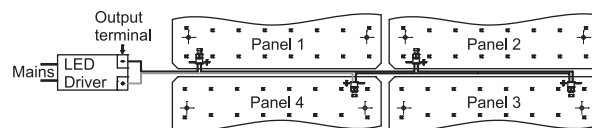


Without distance between LED modules

Feed-in lateral with wiring on top




Feed-in central with rear wiring



Connection Diagram 2 – Centralised Feed-in

4 LED Panels WU-M-520 (all in series)

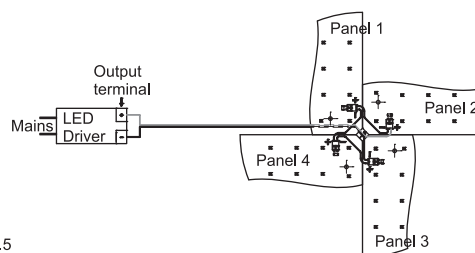


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Light Panel SMD

Mechanical Dimensions

- The number of modules that can be connected in series depends on the available output voltage of the LED driver.
- The clearance and creepage distances are designed for working voltages up to 500 V DC (basic insulation) and 250 V DC (reinforced insulation).
- Max. diameter of screw head (M4): \varnothing 8 mm


WU-M-537

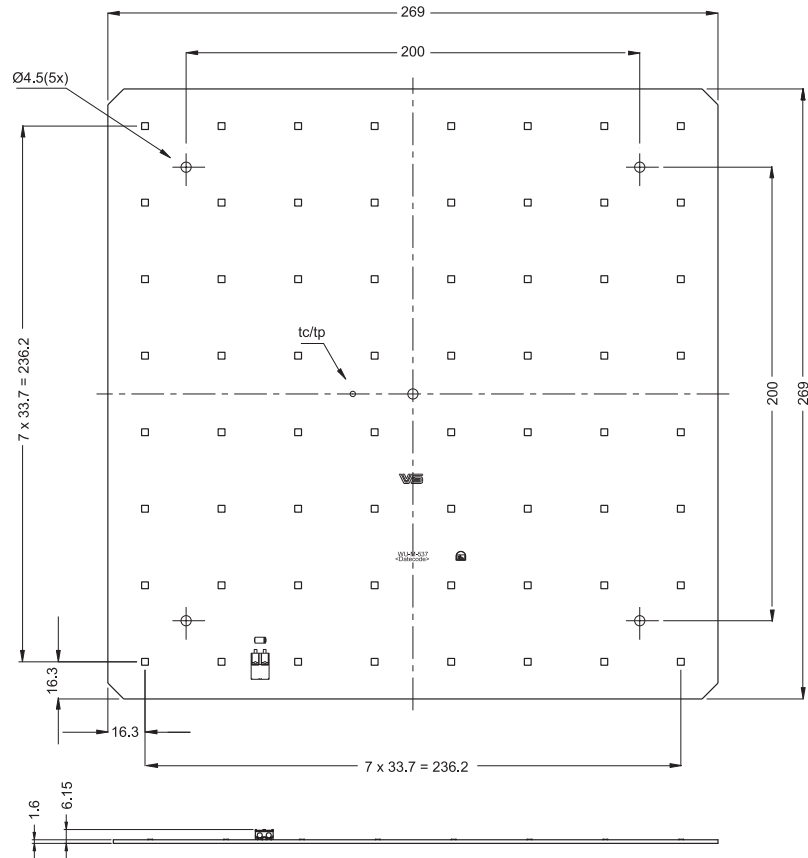


Connection Examples

With 10 mm distance between LED modules

Feed-in lateral
with wiring on top




Positioning with 90° rotation
Feed-in central coming from the rear side




Connection Diagram 1 – Decentralised Feed-in

4 LED Panels WU-M-537 (all in series)

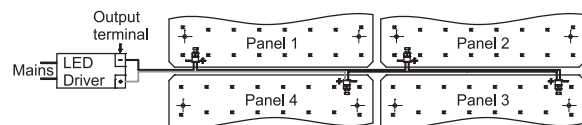


Without distance between LED modules

Feed-in lateral
with wiring on top




Positioning with 90° rotation
Feed-in central coming from the rear side



Connection Diagram 2 – Centralised Feed-in


4 LED Panels WU-M-537 (all in series)

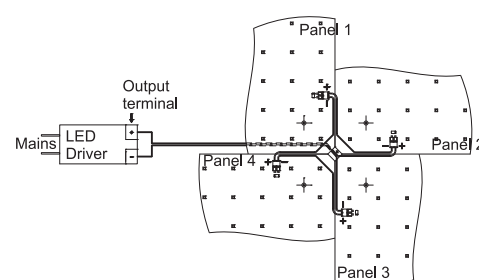

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Light Panel SMD

Bins

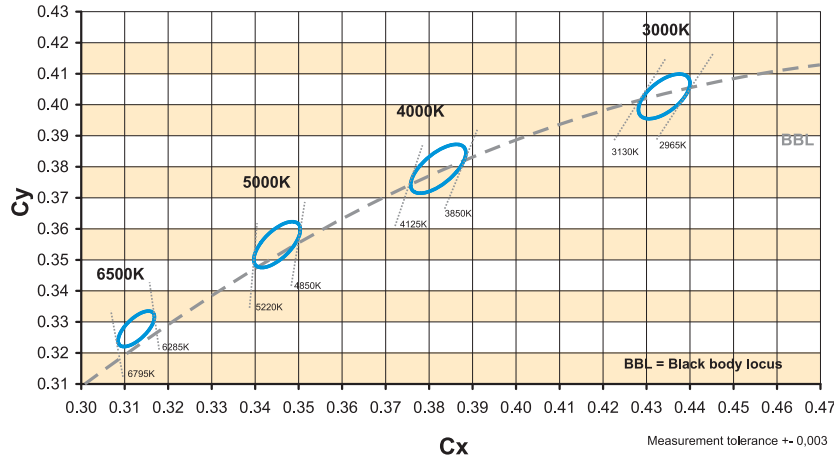

Fixing Clip


For fastening LED PCBs to luminaire sheets without needing screws

PCB hole dia.: 4.3–4.7 mm

Vibration resistant version

Material: PC, white (UL-94 V2)

Weight: 0.2 g, Packaging unit: 1000 pcs. (.11 = 10,000 pcs.)



Type	Ref. No.	For luminaire sheet thickness (MS) mm
98050	562870	0.5–1.0*

* PCB thickness: 1.6 mm

LED Constant Current Drivers

Please visit our homepage for details for suitable

LED constant current drivers: www.vossloh-schwabe.com

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.

- Consider safety regulations acc. EN 60598 in the luminaire design, especially when the operating LED driver is not galvanic isolated (not SELV).
 - In mode of operation regard to sufficient isolation.
 - Live parts must not be touched in operation mode.
- Danger in life!!!



- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules. See VS's application notes on ESD protection.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools could be used.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools could be used.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Light Panel SMD

Assembly and Safety Information

- LED assembly modules must not be subjected to any undue mechanical stress, e. g.:
 - do not treat as bulk cargo
 - avoid shear and compressive forces during handling and installation
 - do not damage circuit paths
 - avoid any pressure on the light emitting surface
- Safe operation only possible by the use of external constant current sources (I_{max} , see table "Electrical Characteristics").
- Operation only with power supply units that feature the following protection:
 - Short-circuit protection
 - Overload protection
 - Overheating protection
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- For interconnection the LED modules is equipped with push-in terminals (WAGO 2060).
- Safety regulations acc. to EN 60598 (or further standards) has to be observed if the maximum output voltage exceed the permitted touchable value.
- The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward biases, there can be a difference of up to 10% in brightness between modules connected in parallel.
- To ensure problem-free operation, the specified maximum temperature at the t_p point (see "Operating Life") must be observed (and measured in accordance with EN 60598-1). To satisfy this point, it may be necessary to put measures in place to ensure any heat is dissipated from the PCB to the environment.
- Products equipped with adhesive transfer tape must only be applied to dry and clean surfaces that are free from grease, oil, silicone or other soiling. It is therefore recommended to clean the substrate with isopropyl alcohol (IPA). Please ensure a full-surface bond over the entire contact area when sticking the module to the substrate. The following substances are regarded as critical for creating an adhesive bond:
 - Polyefins (polyethylene, polypropylene)
 - Rubber
 - Powder-coated materials
 - Silicone rubber
 - TeflonOwing to the varying application options and different types of surface as well as ambient conditions, VS accepts no liability for the quality of the adhesive bond achieved when mounting these products. Prior to sticking a VS product care must be taken to check whether the material in question is actually suitable for the intended purpose under consideration of all possible application-relevant influences. Supplementary holders must be used if necessary.

- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognised as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- Due to the manufacturing process, the PCBs of the LED assembly modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure. Detailed information can be found in our "Chemical Incompatibility" PDF on our website www.vossloh-schwabe.com
- The photobiological safety of the LED modules must be classified into risk groups in accordance with EN 62471: 2008 Assessment of risk groups in acc. with IEC/TR 62778: risk group 1

Applied Standards

EN 62031
LED modules for general lighting – Safety specifications

EN 62471
Photobiological safety of lamps and lamp system

Product Guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.